

1/2 | **ROTATABLE FLANGED FITTINGS
S-PIECE**



SPECIFICATIONS :



Norm : **NFA 48-840**

MATERIAL & COATING :

Spheroidal Cast Iron GJS 420-5.
Reinforced epoxy paint RAL 5005 (250µm mini according to EN 14901) food-grade.

ASSEMBLY :

S-PIECE allows the hydrants to be connected to any pipe, ensuring that they are positioned at ground level.
Flat gaskets available upon request.
Bolt tightening torque depends on gasket type and nominal pressure.

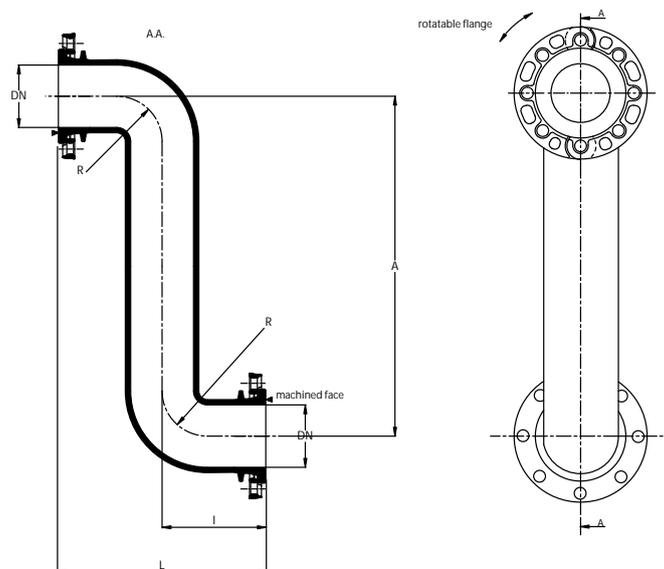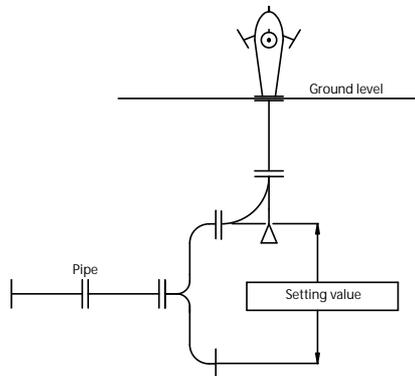

Reference	DN	Radius	Length			Thickness e	Weight with flanges Kg	Nominal pressure				
		R	A	I	L			PN 10	PN 16	PN 25	PN 40	
		mm						Kg	bar			
9402	100	75	500	175	300	8,5	25	x	x			
31688	150	75	500	200	400	8,5	42	x	x			

All dimensions, weights and norms are given for information only. SOVAL reserves the right to modify the specifications of products given in the present document.

2/2 | **ROTATABLE FLANGED FITTINGS
S-PIECE**



**ASSEMBLY OF THE
FLANGES**

The movable flange segments of our fittings are assembled using **steel rings for greater resilience.**



**REINFORCED EPOXY
COATING**

Epoxy paint coating RAL 5005 and food-grade.
Reinforced thickness of **250 microns and ACS approval.**

Related products



All dimensions, weights and norms are given for information only. SOVAL reserves the right to modify the specifications of products given in the present document.