1/2

ROTATABLE FLANGED FITTINGS
S-PIECE

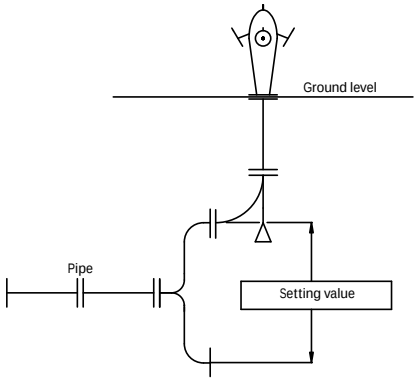

SPECIFICATIONS:

Norm: **NFA 48-840**

MATERIAL & COATING:

Spheroidal Cast Iron GJS 420-5.
Reinforced epoxy paint RAL 5005 (250μm according to EN 14901) food-grade.

ASSEMBLY:

S-PIECE allows the hydrants to be connected to any pipe, ensuring that they are positioned at ground level.
Flat gaskets available upon request.
Bolt tightening torque depends on gasket type and nominal pressure.

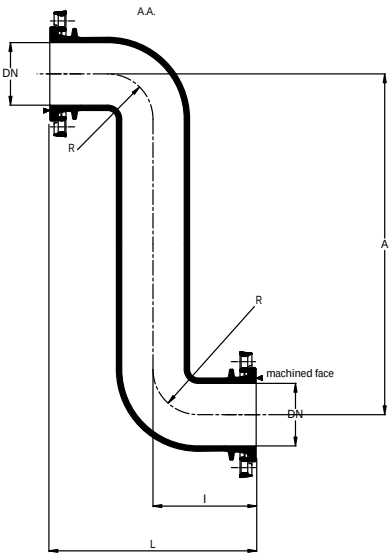

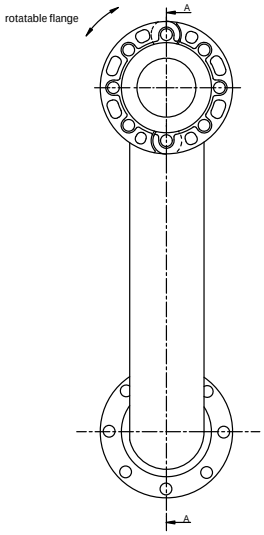

Reference	DN	Radius	Length			Thickness	Weight with flanges	Nominal pressure			
		R	A	I	L	e		PN 10	PN 16	PN 25	PN 40
	mm						Kg	bar			
9402	100	75	500	175	300	8,5	25	x	x		
31688	150	75	500	200	400	8,5	42	x	x		

All dimensions, weights and norms are given for information only. SOVAL reserves the right to modify the specifications of products given in the present document.

2/2

ROTATABLE FLANGED FITTINGS
S-PIECE

ASSEMBLY OF THE FLANGES

The movable flange segments of our fittings are assembled using **steel rings for greater resilience.**

REINFORCED EPOXY COATING

Epoxy paint coating RAL 5005 and food-grade.
Reinforced thickness **of 250 microns and ACS approval**.

Related products

ZINC PLATED STAINLESS STEEL, GEOMET FASTENERS

HIGH PRESSURE GASKETS

ROTATABLE FLANGED FITTINGS DUCKFOOT 90° BEND

FIRE HYDRANT

All dimensions, weights and norms are given for information only. SOVAL reserves the right to modify the specifications of products given in the present document.