

**DUCTILE IRON FITTINGS
FOR PVC PIPES
45° DOUBLE SOCKET BEND**



SPECIFICATIONS :

Norm : **EN 12842**

MATERIAL & COATING :

Spheroidal Cast Iron GJS 420-5.
Reinforced epoxy paint RAL 5005 (250µm
mini according to EN 14901) food-grade.
EPDM gasket


ASSEMBLY :

Assembly with double automatic push-in joint fittings for PVC pipes in compliance with current standards.

The pipes to be fitted together must be cut perpendicularly and chamfered at the end.

Watertightness is made by a radial compression of the EPDM gasket when the pipe is simply fitted.

Backlash (J) for angular deflection must be respected.

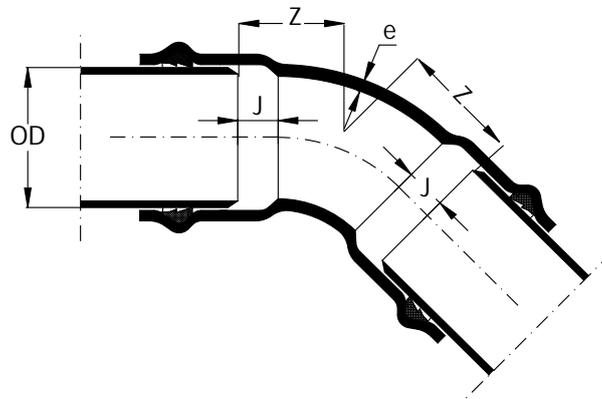

Reference	Outer Ø PVC	Working length Z	Backlash mini J	Thickness e	Weight	Nominal pressure	
	OD					PN 10	PN 16
		mm			Kg	bar	
1461	63	50	10	8,0	3,5	x	x
1462	75	60	15	8,5	3,5	x	x
1463	90	65	15	8,5	4,5	x	x
1464	110	75	15	8,5	6,5	x	x
1465	125	80	15	9,0	8,5	x	x
1466	140	85	15	9,0	9,5	x	x
1467	160	95	15	9,5	12,0	x	x
1468	200	110	15	9,5	19,0	x	x
1469	225	125	15	9,5	25,5	x	x
1470	250	135	15	9,5	33,5	x	x
1471	315	165	20	10,0	49,0	x	x