

**RECESSED INFILL HYDRAULIC
ACCESS COVER
REF.401 - 400 KN**



PLACE OF USE:

(including pedestrian streets) Hard shoulders and parking areas, for all types of road vehicles.

SPECIFICATIONS:


Loading: **400 kN slow traffic**

MATERIAL & COATING:

Cover & Frame: Spheroidal cast iron EN-GJS 500-7. Water based black paint

REMARKS:

Single seal ensuring odor-tightness against rising odors

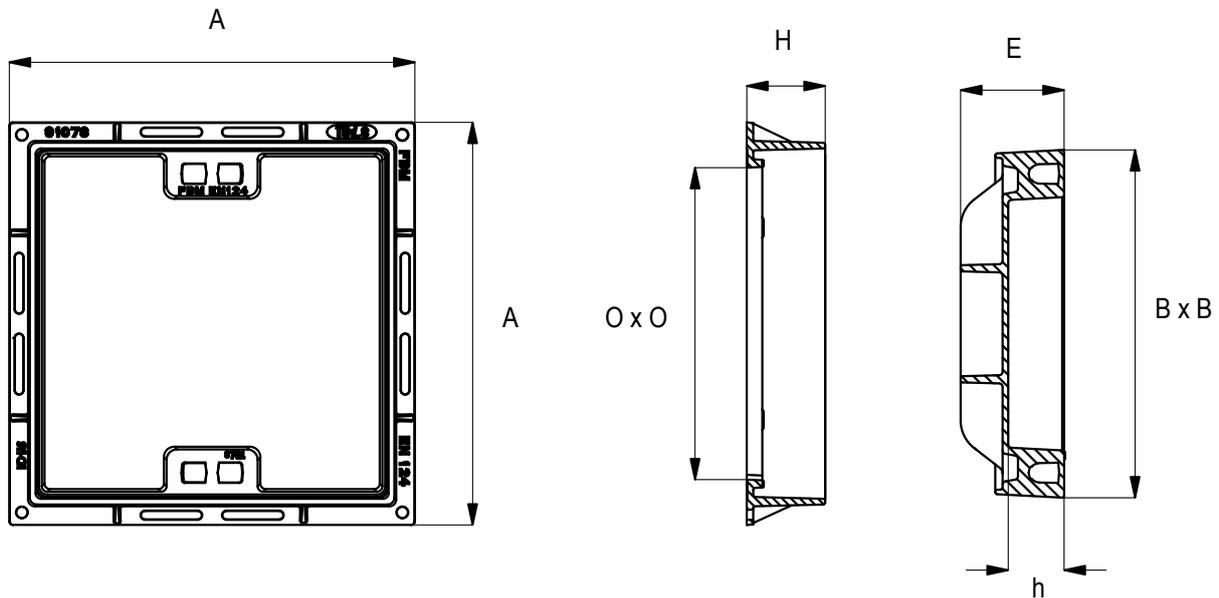

Ref.	Description	Frame	A	B	H	O	h	E	Weight	
									cover	total
									mm	
									Kg	
32911	350 x 350	square	400	345	112	300	80	140	19.0	35.0
32912	500 x 500	square	580	500	112	450	80	150	36,0	56,5
32913	650 x 650	square	740	650	112	600	80	160	52,5	81,0

All dimensions, weights and norms are given for information only. SOVAL reserves the right to modify the specifications of products given in the present document.