

**VFTE GASKET KIT SOUPLESSUR
FOR DUCTILE IRON PIPES**



SPECIFICATIONS :

Norm : **EN 545**

Mechanical anchored joint fitting.

Assembly instructions are included with each kit.

MATERIAL & COATING :

Bolted gland :

Spheroidal Cast Iron GJS-500-7


Locking ring :

Spheroidal cast iron GJS-420-5

Reinforced epoxy paint RAL 5005 (250µm mini according to EN 14901) food-grade.


SOUPLESSUR gasket : EPDM food-grade (according to EN 681-1)

Fasteners : Screws steel class 8.8 coated GEOMET-500 grade B with cast iron nuts

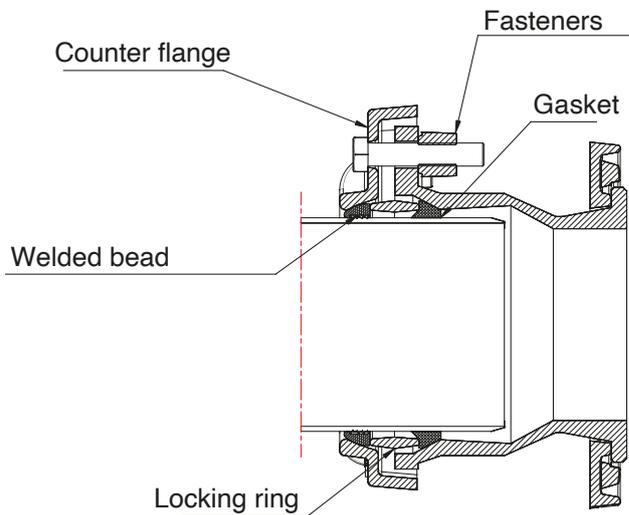

COUNTER FLANGE

2NO BOLTS

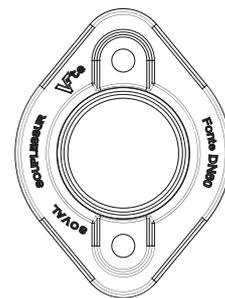

Reference	DN	bolts/kit	Range	Tightening torque	Weight	Working pressure
	-		mm	Nm	kg	bar
15305	60	2xM16-80	76-78	80	2,70	PN 10 - PN 16
15306	80	2xM18-90	95-99	80	3,50	PN 10 - PN 16

All dimensions, weights and norms are given for information only. SOVAL reserves the right to modify the specifications of products given in the present document.