

1/2

DOUBLE SOCKET TEE WITH LOOSE FLANGE BRANCH SOUPL-TE FOR DUCTILE IRON PIPES



SPECIFICATIONS :

Norm : **EN 545**


The Soupl-TE range can be used for automatic push-in joint or mechanical anchored joint assemblies.



MATERIAL & COATING :

Spheroidal Cast Iron GJS 420-5.
Reinforced epoxy paint RAL 5005 (250µm mini according to EN 14901) food-grade.

- For automatic push-in joint gasket kits, see datasheet :
«**SOUPL-T-KIT-TYTON**»
«**SOUPL-T-KIT-BRS**»
- For mechanical anchored gasket kits, see datasheet :
«**SOUPL-T-KIT-STD**»
«**SOUPL-T-KIT-VFTE**»

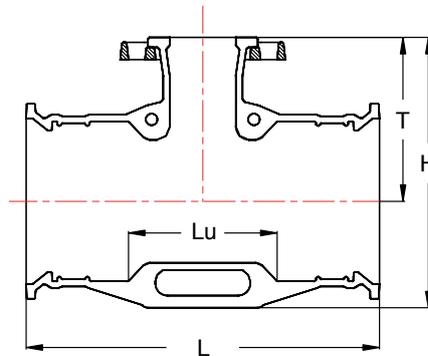

Ref.	Nominal diameter		Symbol	L	Lu	T	H	Weight	Range	PFA 10	PFA 16
	body DN	tubing dn									
				mm				kg	mm		
25792	100	Té Tb60		381	155	165	266	14,2	115-119	X	X
25793		Té Tb80		391	165	170	271	15,3		X	X
25794		Té Tb100		421	195	180	281	17,0		X	X
29622	125	Té Tb60		398	160	180	295	19,0	141-145	X	X
29623		Té Tb80		413	175	185	300	20,0		X	X
29624		Té Tb100		433	195	195	310	21,0		X	X
29625		Té Tb125		463	225	200	315	23,0		X	X
25778	150	Té Tb60		408	160	190	330	21,0	167-171	X	X
25779		Té Tb80		428	180	200	330	22,3		X	X
25780		Té Tb100		448	200	205	335	23,1		X	X
25781		Té Tb125		478	230	215	345	26,1		X	X
25782		Té Tb150		508	260	220	351	29,0		X	X
25795	200	Té Tb60		430	180	215	371	27,6	219-223	X	X
25796		Té Tb80	430	180	225	381	29,0	X		X	
25797		Té Tb100	450	200	230	386	29,9	X		X	
25798		Té Tb150	510	260	245	401	36,9	X		X	
25799		Té Tb200	570	320	260	416	42,0	X		X	

All dimensions, weights and norms are given for information only. SOVAL reserves the right to modify the specifications of products given in the present document.

2/2

DOUBLE SOCKET TEE WITH LOOSE FLANGE BRANCH SOUPLLESSUR-T FOR DUCTILE IRON PIPES



SOUPLLESSUR-T
Tyton

ASSEMBLY OF THE FLANGES



The movable flange segments of our fittings are assembled using **steel rings for greater resilience**.

REINFORCED EPOXY COATING



All our fittings are coated in our workshops with a food-grade **RAL 5005 epoxy paint**. With a **reinforced thickness of 250 microns and ACS approval**, our products meet the requirements of **EN-545 standard**.

**TYTON® FUNCTION
AUTOMATIC PUSH-IN JOINT FITTING**

- Time savings during installation
- No tightening required

**SOUPLLESSUR FUNCTION
MECHANICAL ANCHORED JOINT FITTING**

- Can be dismantled for servicing
- Easy to adjust on assembly



Related products



All dimensions, weights and norms are given for information only. SOVAL reserves the right to modify the specifications of products given in the present document.