

STANDARD ACCESS COVER LTD C250 CLASS



SPECIFICATIONS:

Norm: **EN 124-2**

Loading: **250 kN**

Quality label: **Tüv**

MATERIAL & COATING:

Hatch cover: Spheroidal cast iron

EN-GJS-500-7. Water based black paint

Hatch frame: Steel hot-dip galvanized

REMARKS:

Lifting slots in «L» thanks to breakable areas of 20x40 mm

OPTIONS:


Fall safety equipment

Custom badging & logo

Handling tools

EPDM soundproofing pads

Obturbateurs plastiques pour point de préhension

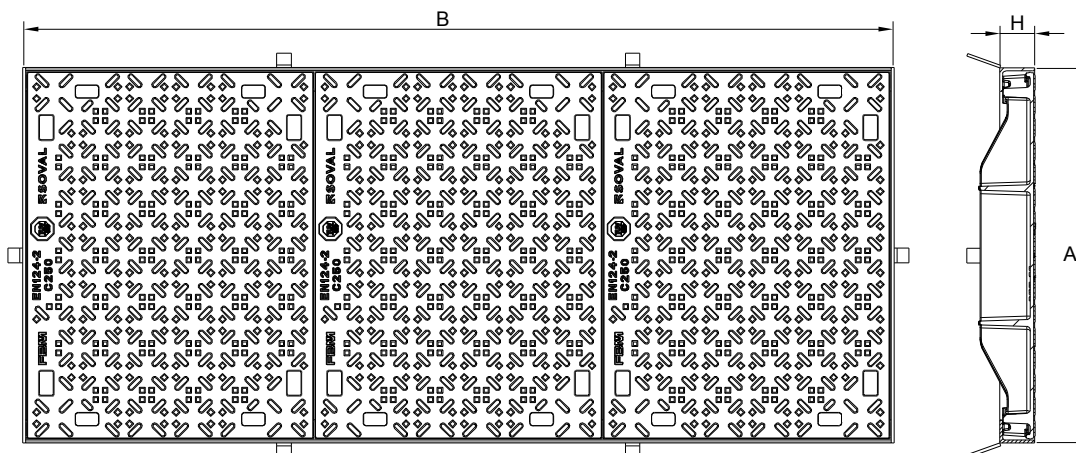

Ref.	Description	Lay-out	Clear opening	A*	B*	H*	Total weight
				mm			Kg
49487	L1TD		635 x 427	507	645	60	49
49488	L2TD		1269 x 427	507	1279	60	63
49489	L3TD		1489 x 565	647	1499	60	89,8
49490	L4TD		1876 x 527	647	1996	60	128,8
49491	1/2 L4TD		992 x 565	647	1002	60	62
49393	Cover alone						25

*External frame measures

STANDARD ACCESS COVER TYPES LTD CLASSE C250



EPDM SOUNDPROOFING PAD

En option des patins anti-bruit pour le confort acoustique peuvent-être proposés.
Ref. 36724. Consult us



OBTURATEUR PLASTIQUE

Obturbateurs plastiques disponibles en option pour reboucher les points de préhension débouchant.
Ref. 24533. Consult us



BESPOKE

On request, the manhole cover can be tailor-made with a special **badging embossed** and moulded in raw material & with a topcoating colored polyester paint

Related products

