


**LOCKED ACCESS COVER  
EP100 D400 SLOW TRAFIC FLOW**

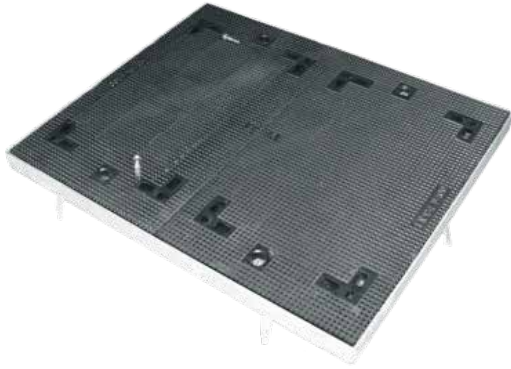

PLACE OF USE:

**D400 slow traffic flow:** (including pedestrian steets) Hard shoulders and parking areas, for all types of road vehicles.

SIGNIFICATIONS :


Norm: **EN 124-2**  
Loading: **400 kN**  
Locking: ¼ turn lock H Ø22 Stainless steel  
Quality label: **Tüv**

OPTIONS:

Special lock: burglar-proof SAE  
Fall safety equipement  
Custom badging & logo

MATERIAL & COATING:

**Hatch cover:** Spheroidal cast iron  
EN-GJS-500-7. Water based black paint  
**Hatch frame:** Steel hot-dip galvanized

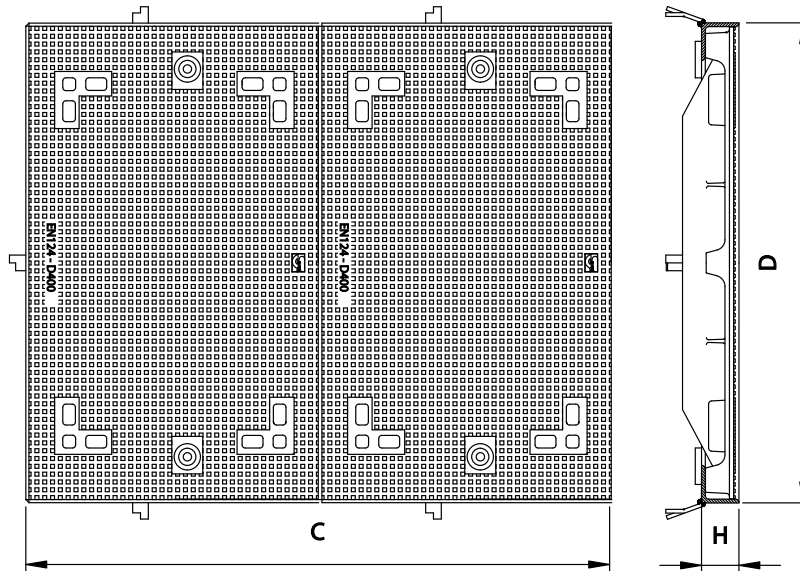

Ref	Description	Lay-out	Clear opening	C*	D*	H	Total weight
				mm			Kg
11544	EP 100		1000 x 800	1120	920	60	152
Weight / Lid (Kg)							65

\*External frame measures

All dimensions, weights and norms are given for information only. SOVAL reserves the right to modify the specifications of products given in the present document.