1/2

MULTI-LEAF ACCESS COVER
2XPTVAA - 400 KN SLOW TRAFFIC FLOW WITH MONOBLOC FRAME

OPTIONS:

Special lock: burglar-proof SAE
Fall safety equipment
Badging & Logo

PLACE OF USE:

400 kN slow traffic flow : (including pedestrian steets) Hard shoulders and parking areas, for all types of road vehicles.

SPECIFICATIONS:

Loading: **400 kN**
Central removable beam
Locking: ¼ turn lock H Ø22 Stainless Steel

MATERIAL & COATING:

Hatch cover: Spheroidal cast iron EN-GJS-500-7. Water based black paint
Hatch frame: Steel hot-dip galvanized
Hardware: Stainless steel / cast iron

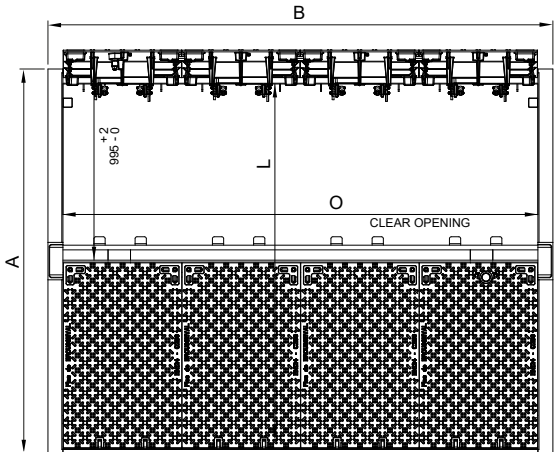

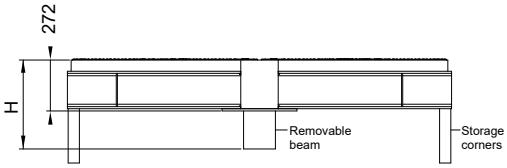

Ref.	Description	Lay-out	Clear opening	A	B	H	Weight	
							Beam	Total
			mm				Kg	
39518	**2xL5TVAA**		1892 x 1903	2052	2063	475	161	863
39520	**2xL6TVAA**		1892 x 2537	2052	2697	475	213	1335
39237	**2xM2TVAA**		1892 x 3170	2052	3330	515	288	1654
Weight / Lid (Kg)							96	

All dimensions, weights and norms are given for information only. SOVAL reserves the right to modify the specifications of products given in the present document.

2/2

MULTI-LEAF ACCESS COVER
2XPTVAA - 400 KN SLOW TRAFFIC FLOW WITH MONOBLOC FRAME

REMARKS :

Gas strut assist lift
Safety blocking to prevent accidental cover closure, activated automatically at the opening of the cover.
Cut off the storage corners before sealing and concrete pouring.

CONCRETE FORMWORK:

Ref.	Lay-out	O	L
		mm	
2xL5TVAA		1892	1903
2xL6TVAA		1892	2537
2xM2TVAA		1892	3170

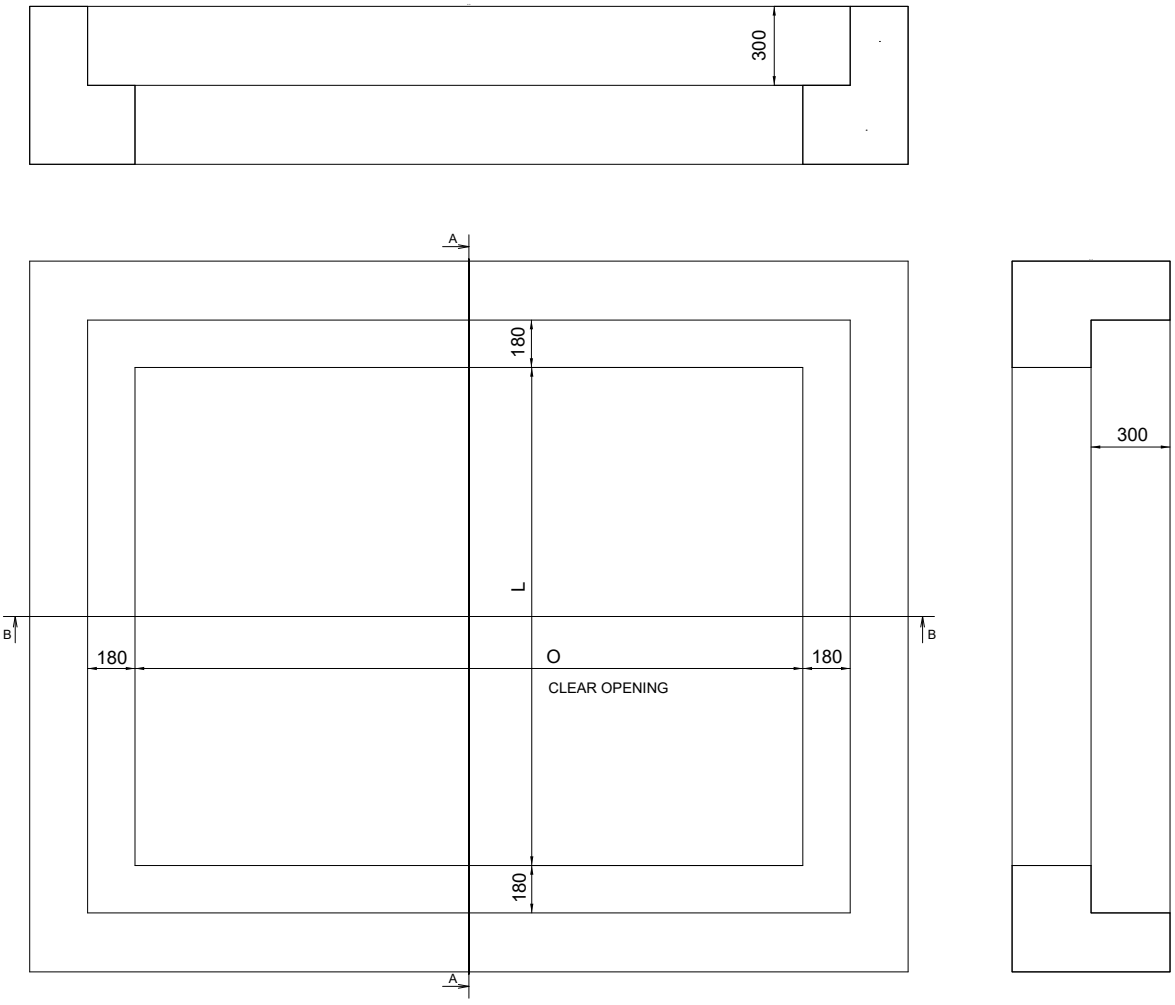

All dimensions, weights and norms are given for information only. SOVAL reserves the right to modify the specifications of products given in the present document.