

1/2

ROTATABLE FLANGED FITTINGS TEE DN 500 TO 700



SPECIFICATIONS:

Norm: **EN 545**





MATERIAL & COATING:

Spheroidal Cast Iron GJS 420-5.
Reinforced epoxy paint RAL 5005 (250µm
according to EN 14901) food-grade.

ASSEMBLY:

Flat gaskets available upon request.
Bolt tightening torque depends on gasket
type and nominal pressure.

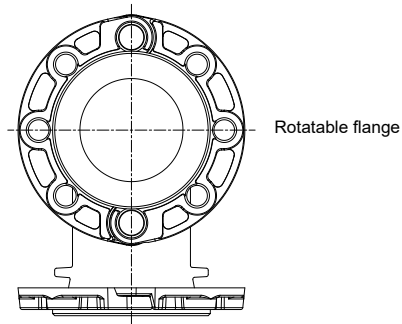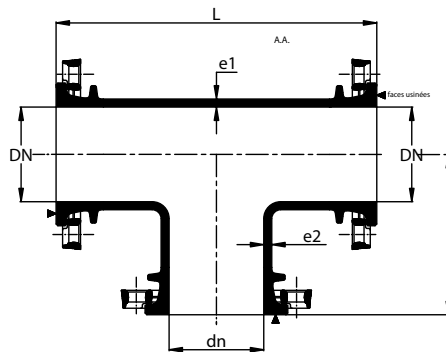

Rotatable flange

Reference	Nominal diameter		Length		Thickness		Weight	Nominal pressure	
	body DN	tubing dn	body L	tubing l	body e1	tubing e2		PN 10	PN 16
			mm				Kg	bar	
10862	500	100	535	420	12	7,2	158	x	*
15726		150	535	420	12	7,8	170	x	*
10861		200	650	440	12	8,4	181	x	*
15727		250	650	440	12	9,0	192	x	*
10860		300	765	460	12	9,6	208	x	*
15728		350	825	480	12	10,2	228	x	*
10859		400	885	480	12	10,8	240	x	*
*		450**	1000	500	20	19,0	355	x	*
10858	600	500	1000	500	12	12,0	306	x	*
*		100	700	480	13,2	7,2	286	x	*
*		150	700	490	13,2	7,8	303	x	*
*		200	700	500	13,2	8,4	312	x	*
*		250**	1100	450	25,5	14,0	450	x	*
15962		300	810	520	13,2	9,6	326	x	*
*		350**	1100	550	22,5	16,5	475	x	*
15963		400	930	540	13,2	10,8	334	x	*
*		450**	1100	550	22,5	19,0	500	x	*
15964		500	975	550	13,2	12,0	394	x	*
15965		600	1100	550	13,2	13,2	449	x	*
*	700	200**	1200	500	24,5	13,0	605	x	*
*		250**	1200	500	24,5	14,0	615	x	*
*		300**	1200	600	24,5	15,5	630	x	*
*		350**	1200	600	24,5	16,5	640	x	*
*		400**	1200	600	24,5	17,5	650	x	*
*		450*	1200	600	24,5	19,0	660	x	*
*		500**	1200	600	24,5	20,0	670	x	*
*		600**	1200	600	24,5	22,5	685	x	*
*		700**	1200	600	24,5	24,5	710	x	*

* consult us
** fixed flanges

2/2 | ROTATABLE FLANGED FITTINGS TEE DN 500 TO 700



ASSEMBLY OF THE FLANGES


The movable flange segments of our fittings are assembled using **steel rings** for greater resilience.



REINFORCED EPOXY COATING

Epoxy paint coating RAL 5005 and food-grade.
Reinforced thickness of **250 microns** and **ACS** approval.

Related products



**ZINC PLATED
STAINLESS STEEL,
GEOMET FASTENERS**



**HIGH PRESSURE
GASKETS**



**FLANGE ADAPTORS
390 FOR DUCTILE IRON
PIPES, PVC, PE**



**BLIND FLANGE AND
REDUCING PLATE
DN40 TO DN 700**